

SANY

SY305LC

TRACKED EXCAVATOR

Max. Gross Power

209 kW / 2,100 rpm

Operating Weight

31,500 - 32,060 kg

Max. Dig Depth

6,815 mm



SANY: FORGING THE FUTURE TOGETHER

Founded in 1989, SANY has grown into one of the world's largest construction equipment manufacturers, with global R&D and production – including European facilities – and machines working in 150+ countries. Our range spans excavators, road and port machinery, and cranes, built with proven manufacturing heritage and modern quality systems.

A GLOBAL LEADER BEHIND EVERY RANGE

From micro excavators to high-tonnage earthmovers, cranes, telehandlers, concrete machinery, road equipment and more, SANY's worldwide product range reflects decades of innovation, investment, and real-world experience.

This broad international range is proven on job sites in over 150 countries, ensuring every machine delivered to Europe is backed by extensive testing, real-world performance and the strength of a global supply chain.

ENGINEERED FOR OUR EUROPEAN CUSTOMERS

Every SANY machine destined for Europe is engineered to meet European regulations and real-world use cases – from CE and Stage V compliance to region-specific specifications and options.

For European construction customers, this worldwide capability translates directly into trust. SANY selects and engineers its product line specifically for local requirements, combining global innovation with European-quality standards, dealer support and service.

GLOBAL MANUFACTURING EXCELLENCE

SANY's long-standing commitment to quality and innovation – supported by advanced intelligent manufacturing and a sustained 5-7% of annual revenue reinvested into R&D – results in machines that deliver reliability, efficiency, and consistent performance on site.

With state-of-the-art production facilities and rigorous global testing standards, every machine is built to withstand demanding conditions and deliver long-term value.

INTRODUCING THE SY305LC

Engineered for versatility and efficiency, the SANY SY305LC combines powerful performance, precise control and proven reliability. Its 209kW engine and 204kN bucket breakout force deliver impressive capability across construction, earthmoving and site-development projects. A spacious, comfortable operator environment supports productivity throughout the working day, while efficient hydraulics, premium components and a generous standard specification help reduce operating costs and minimise downtime.



WHY CHOOSE SANY EXCAVATORS



WORLD RENOWNED COMPONENTS

SANY uses proven, top-tier components to deliver long-lasting reliability meaning you benefit from fewer breakdowns, longer service life, and lower ownership costs.



GREAT VALUE, UNCOMPROMISED QUALITY

You can have confidence in your return on investment. SANY excavators are loaded with the latest innovation to help reduce costs, increase productivity and protect resale value.



INDUSTRY LEADING 5 YEAR WARRANTY

Built to last and backed by an industry-leading 5-year warranty giving you lower risk, predictable costs, and confidence on every job.



LOW OPERATING COSTS

Simple engineering, readily available parts, and low fuel consumption reduce ongoing running costs, a major advantage in Europe's high-cost markets.




LOCAL SUPPORT

Europe-wide expert dealers and value-added aftermarket support keep your machine running, minimise downtime, and simplify ownership.



STANDARD ADVANCED FEATURES

SANY excavators include game-changing features as standard, no costly add-ons or custom modifications required.

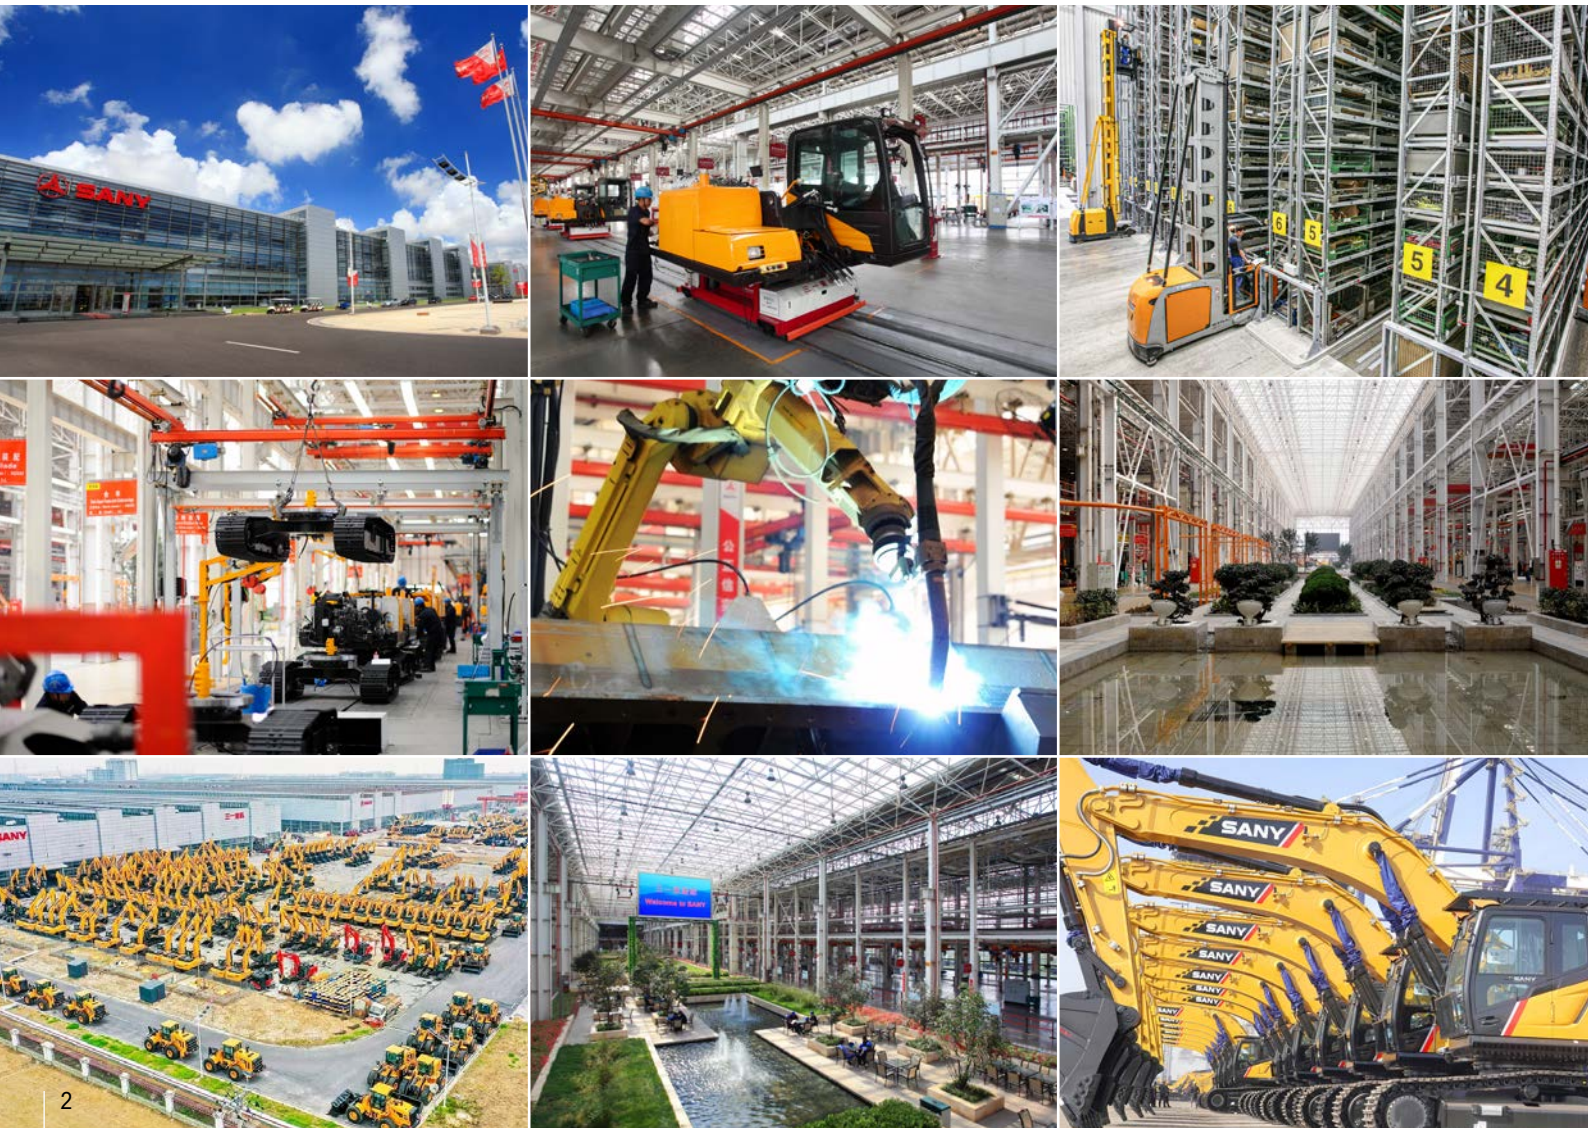

SY305LC PRODUCTIVITY

Ready to take on everything from site preparation and utility work to bulk excavation and earthmoving, the SY305LC brings dependable performance to every project. Its Stage V Cummins engine delivers power where it matters, while a durable undercarriage and smooth, responsive hydraulics provide precise control, strong digging capability and efficient cycle times throughout the end of the day.



POWERFUL, PRECISE PERFORMANCE

← The SY305LC is powered by a Stage V Cummins engine delivering 209kW of proven performance for demanding high-volume excavation applications.

With a 6.8m digging depth and exceptional 204kN bucket breakout force, the SY305LC delivers the power and performance required to maximise output in heavy-duty excavation and quarrying environments.

The heavy-duty undercarriage and robust boom design deliver exceptional stability, providing a solid platform for confident lifting, precise operation and productive performance in demanding applications.

VERSATILE OPERATION

Equipped with standard hammer and bi-directional pipework, the SY305LC is ready to run a wide range of attachments for maximum on-site versatility.

HYDRAULICS DESIGNED FOR PRODUCTIVITY

→ SANY's twin auxiliary hydraulics as standard allow you to operate a wider range of attachments with powered movement in both directions, giving you reversible control and faster task changes.

The hydraulic quick hitch system, operated through the touchscreen display, enables fast and convenient attachment changes, reducing downtime and increasing productivity across a wide range of applications.



SY305LC EFFICIENCY

Built to protect both the operator and the machine, the SY305LC combines reinforced structural components with advanced stability and security systems. Excellent visibility, a strengthened structure and strategically positioned safety features improve awareness, minimise risk and inspire confidence on demanding, fast-moving worksites.



EFFICIENT OPERATION

→ SANY's two-speed tracking lets the operator choose high or low travel to match terrain and task reducing unnecessary revs and therefore fuel usage.

ENERGY-EFFICIENT HYDRAULICS


SANY's load-sensing hydraulics deliver only the flow and pressure the working circuits need, so the system wastes less energy and burns less fuel.

A well-matched engine and hydraulic system that measures pump output to demand reduces wasted flow and fuel resulting in lower running costs for the customer.

The SY305LC features a Stage V Cummins engine delivering 209kW of efficient power, helping to reduce fuel consumption without compromising performance.

Optimised engine performance and intelligent power management ensure fuel is used effectively throughout the working day, lowering operating costs and maximising productivity from every litre.

A 540 litre fuel tank and efficient consumption allow for extended refuelling intervals, cutting downtime and fuel runs so the machine stays productive longer between stops.

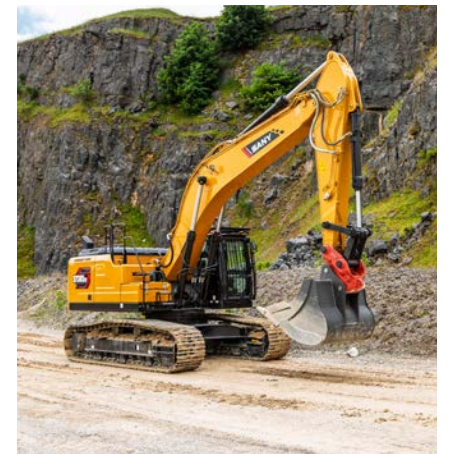

SY305LC

OPERATOR ENVIRONMENT

Recently upgraded with a brand-new premium cab, the SY305LC puts operator wellbeing at the heart of its design. The spacious interior features an ergonomic seat, conveniently positioned controls and excellent all-round visibility, creating a comfortable and intuitive workspace. A generous selection of standard features further reduces fatigue, helping operators remain focused and productive from the beginning of every shift to the end.



PREMIUM COMFORT

← The ergonomic cab features a heated air-suspension seat and adjustable armrests, providing exceptional comfort and support to help reduce fatigue, improve concentration and maximise productivity.

A heater and automatic climate control system maintain a comfortable cab environment in all weather conditions, helping operators remain productive throughout the working day.

The quiet, low-vibration engine reduces noise and vibration levels to a minimum, creating a more comfortable operating environment.

EVERYDAY EASE


Clear instrumentation and a large 10-inch high-resolution colour display provide easy access to key machine information, helping operators work more efficiently and with greater confidence.

Dual proportional control joysticks are fitted as standard, providing precise, responsive control of the machine and its attachments to maximise productivity while reducing operator effort.

The SY305LC is equipped with a Bluetooth radio, USB connectivity, an integrated heated/cooled storage box and generous in-cab storage, providing the convenience and practicality operators need to stay comfortable and productive throughout the day.

JOB SITE AWARENESS


→ The large windows and cab design of our excavators ensure that the operator has the best possible view of the area surrounding the machine.

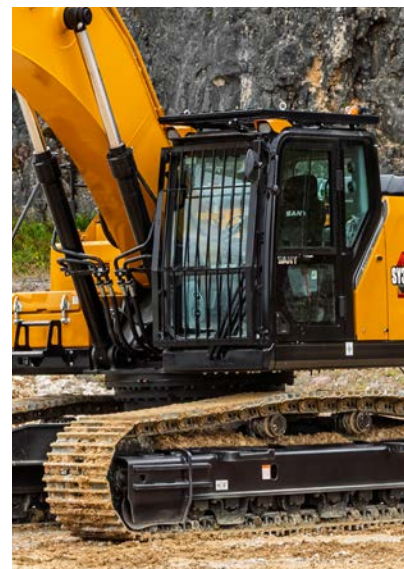

SY305LC

SAFETY & SECURITY

Reinforced structural components combine with advanced stability and security systems to protect both the operator and the SY305LC. Strategically positioned safety features, excellent visibility and a strengthened structure enhance awareness, reduce risk and build confidence across demanding, fast-moving worksites.

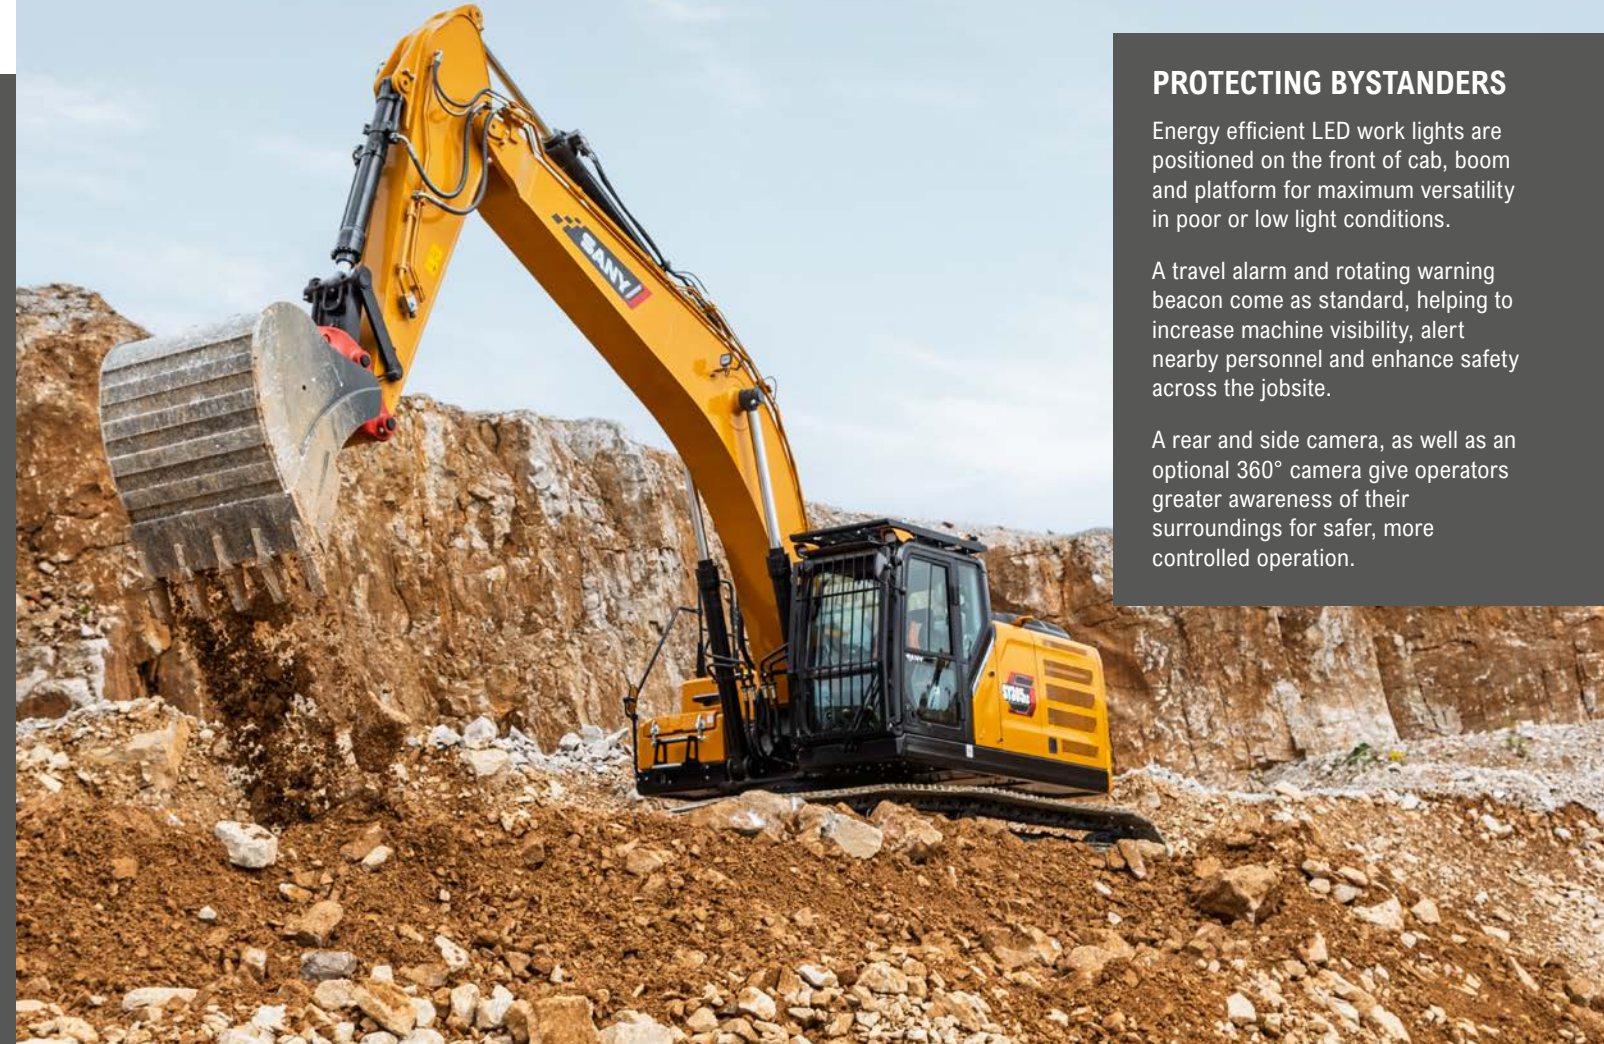

PROTECTING BYSTANDERS

Energy efficient LED work lights are positioned on the front of cab, boom and platform for maximum versatility in poor or low light conditions.

A travel alarm and rotating warning beacon come as standard, helping to increase machine visibility, alert nearby personnel and enhance safety across the jobsite.

A rear and side camera, as well as an optional 360° camera give operators greater awareness of their surroundings for safer, more controlled operation.

STRUCTURAL INTEGRITY

↑ The SY305LC is equipped with a ROPS and FOPS-certified cab, providing a high level of protection and peace of mind when working in demanding environments.

Level II cab guards with openable hinges provide enhanced operator protection while allowing easy cleaning and maintenance. Ergonomically positioned handrails also ensure safe and secure access to the upper structure, helping to reduce risk during routine inspections and servicing.

ADVANCED SECURITY

Lockable service doors protect critical components and fuel systems, preventing unauthorised access and enhancing site security.

A keyless push-button start system with password protection enhances machine security while providing fast, convenient access for authorised operators.

Backed by the CESAR Datatag Scheme for proven theft deterrence and equipped with CESAR ECV, these machines allow swift and dependable verification of emissions category.

EMERGENCY SHUTDOWN

Featuring both a battery disconnect switch and an emergency stop button, the system allows immediate power isolation to enhance operator and site safety.

↓ Advanced anti-theft telematics combines GPS tracking and geofencing to help protect the machine from theft, prevent unauthorised use and provide greater fleet security.



SY305LC

SERVICE & MAINTENANCE


Keeping the SY305LC working at its best is effortless, thanks to wide-opening service doors, conveniently grouped maintenance points and extended service intervals. Durable, high-quality components provide lasting reliability, while the service-friendly design makes routine checks faster, helping to reduce downtime and keep the machine productive.



MAINTENANCE MADE EASY

← SANY excavators are engineered for streamlined service and maintenance, with design features that make routine upkeep faster and more efficient.

A wide-opening engine door provides easy access to all key service points, ensuring that daily checks are quick, simple, and easy to perform whilst ergonomic handrails enable safe access to the maintenance platform.

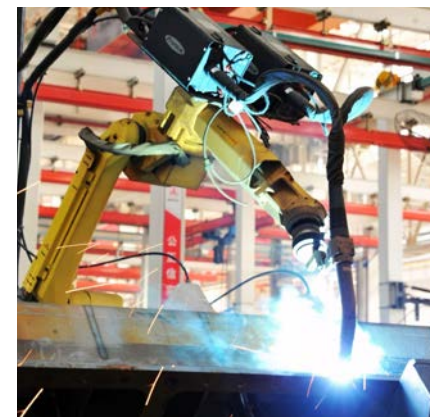

PROTECTED, PREMIUM COMPONENTS

Heavy-duty steel bodywork provides robust protection against on-site damage, safeguarding vital structures and contributing to reduced lifetime ownership costs.

Produced in advanced manufacturing facilities in China, SANY excavators are built for high quality and lasting durability, utilising high-spec components from reputable global manufacturers.

Shared componentry across the range, combined with an extensive European dealer network, ensures rapid response and efficient turnaround for any machine repair.



INCREASED WORKING HOURS

← With extended 500-hour service intervals, maintenance frequency is reduced, lowering operating costs and improving machine availability.

Real-time health alerts, remote diagnostics, and scheduled maintenance via SANY EVI telematics work together to enhance reliability and extend machine life.

SY305LC

ATTACHMENTS

SANY machines offer extended capability through a broad selection of easily interchangeable attachments. This range enables efficient performance across varied tasks such as digging, drilling, land clearing, material handling, and demolition.



BUCKETS

↑ SANY provides a complete range of excavator buckets designed to enhance your machine's efficiency. From general-purpose digging buckets to more specialised options, they enable you to tackle a wide variety of job sites.

QUICK HITCH

Equipped with quick hitches as standard, SANY machines enable rapid attachment changes, helping you get more done in less time. By reducing manual labour and ensuring a secure fit, they expand the machine's versatility and keep your operations running smoothly.

BREAKERS

SANY breakers have been designed to deliver powerful breaking performance, long-lasting durability, and high efficiency. They are suitable for a wide range of applications such as quarry, tunneling, civil construction, trenching, road & landscaping etc.

GRABS

SANY excavator grabs deliver powerful, reliable material handling with high clamping force, smooth hydraulic control and durable steel construction. The result is a cost-effective, high-performance attachment that boosts productivity and control on every job.*

*SANY attachment options may vary depending on country.

SY305LC

YOUR UPTIME. OUR PRIORITY.

Rely on SANY's value-added aftermarket services to keep your equipment operating at peak efficiency. From proactive maintenance to reducing unexpected downtime and controlling operating costs, we provide the support your business depends on. Our European service solutions further boost performance, streamline maintenance tasks, and improve profitability across your fleet.

5 YEAR WARRANTY

Built on a global reputation for reliability and durability, SANY excavators come with an unmatched 5-year warranty* – one of the strongest in the industry.

It's a clear statement of the confidence we have in our machines and our commitment to your uptime. Your investment is protected from day one, giving you the assurance that if an issue arises, you're fully covered.

*Terms and conditions apply.

SERVICE AND SUPPORT


SANY's extensive network of certified technicians and dealer partners provides on-site service and technical expertise designed to minimise downtime and maintain peak machine performance.

Working in coordination with our advanced manufacturing facilities in China, our European teams combine global engineering capability with practical local support.

SANY GENUINE PARTS

SANY genuine parts are engineered, rigorously tested, and manufactured to the exact specifications required by your machine. Their precise fit and compatibility guarantee maximum performance and system integrity.

By maintaining correct operational tolerances, they enhance on-site safety and significantly reduce the risk of unplanned failures or downtime. All genuine parts are supported by a 12-month warranty for added assurance.

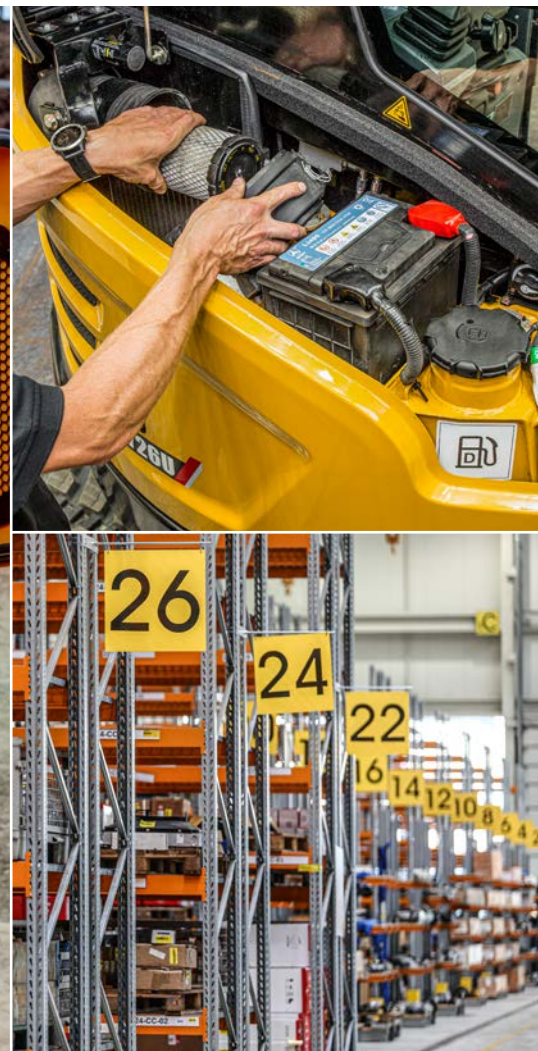

SY305LC

INTELLIGENT SUPPORT

SANY's connected tools give you clarity, confidence, and control on every project. ROOTPILOT brings precision to the bucket; EVI Telematics brings visibility to the fleet. Together, they reduce downtime, cut costs, and boost productivity. Smart technology – driving your success.



Designed exclusively for Europe, our digital fleet management system EVI gives you complete visibility of your machines whenever and wherever you need it. By simplifying fleet oversight, it enables better decision-making, lowers costs, and improves uptime across your operations. With built-in safety and security features that let you monitor location and usage in real time, you gain greater control and peace of mind.

Key benefits include:

- Enhanced fleet visibility and remote machine management
- Set authorised operating hours and create geofenced security zones to reduce theft risk and misuse
- Greater visibility of routine checks and machine health
- Multi-channel, real-time communication for faster decision-making
- Operating report analysis for smarter, data-led decision-making
- Customer account management for personalised, data-backed communication

SANY ROOTPILOT

SANY ROOTPILOT is a high-precision 3D machine-control system that uses GNSS, IMU sensors, and smart algorithms to guide excavators in real time. It gives operators clear, intuitive 3D feedback for faster, safer, and more accurate digging.

ROOTPILOT installs quickly, works with multiple machines and attachments, and syncs designs through the cloud so every operator works from the same plan. It's ideal for highways, municipal works, and foundation projects where precision is critical.

Available in Fundamental and Premium versions, ROOTPILOT supports everything from basic grading to full 3D model guidance, offsets, layer control, and complex digital designs.

Main customer benefits:

- ±3 cm accuracy for first-time-right excavation
- Avoidance of underground utilities and hazards
- Lower fuel, labour, and rework costs
- Faster production with fewer survey checks
- Works with 2D or full 3D design models
- Boosts operator confidence and consistency

SY305LC

SPECIFICATION

ENGINE	
Model	Cummins L9-280
Type	Water-cooled, 4-cylinder, common rail with AdBlue
Exhaust emissions	Stage V
Rated power	209 kW @ 2,100 rpm
Max. torque	1472 Nm @1,400 rpm
Displacement	8.9 L

HYDRAULIC SYSTEM	
Main pump	2 x variable-piston-pumps with electronic positive control
Max. oil flow	562 l/min (2 × 281 l/min)
Travel motor	Two speed axial piston motor with planetary reducer and automatic multi-disc brake
Swing motor	Axial piston motor with planetary reducer and automatic holding brake
Max. oil flow (AUX 1)	281 x 2 l/min

PERFORMANCE	
Swing speed	9 rpm
Max. travel speed	5.2 km/h
Max. travel force	245 kN
Gradeability	70%/35°
Bucket capacity	1.65 m³
Ground pressure	60.3 kPa
Bucket digging force (ISO)	204 kN
Arm digging force (ISO)	153 kN

SERVICE REFILL CAPACITIES	
Fuel tank	540 L
Engine coolant	36 L
Engine oil	30 L
Drive (per side)	8.5 L
Hydraulic oil tank	300 L

Based on theoretical calculation at max flow with no load.

Subject to alterations.

In the interest of continual equipment development, SANY reserves the right to change these specifications at any time without prior notification.

OPERATING WEIGHT
31,500 - 32,060 kg
Note: Includes 75kg (165 lb) operator, full fuel tank and excludes any attachments or hitch.


UNDER & UPPER STRUCTURE	
Boom length	6,150 mm
Arm length	3,200 mm (2,600 / 2,900 mm Opt)
Bottom rollers	8 x 2
Top rollers	2 x 2
Rotation device	Planetary gear reducer driven by an axial piston motor, automatic hydraulic released slewing brake

RELIEF VALVE SETTINGS	
Implement circuit	34.3 MPa
Power boost	37.3 MPa
Swing circuit	27.5 MPa
Travel circuit	34.3 MPa
Pilot pressure	3.9 MPa

SOUND LEVEL	
Noise level inside cabin	70 dB(A)
Noise guaranteed value	105 dB(A)

SY305LC

SPECIFICATION

SY305LC LIFTING CAPACITIES											
Load Point Height (B)		Radius (A)						Digging Reach			
		3.0 m		4.5 m		6.0 m		Max			
											
7.5 m	kg							3142.465	3142.465		
6.0 m	kg							3143.332	3143.332		
4.5 m	kg							*8777	*8777	3099.063	2783.404
3.0 m	kg			*13301	10813	*10078	7211	3182.79	2540.632		
1.5 m	kg			*15494	10106	*11268	6853	3381.353	2450.684		
Ground line	kg			*16368	9767	*11989	6615	3717.271	2494.175		
−1.5 m	kg	*12939	*12939	*16113	9688	10261	6514	4110.75	2703.045		
−3.0 m	kg	*20377	*20377	*14864	9777	*11298	6547	4996.223	3295.599		
−4.5 m	kg	*16297	*16297	*12257	10032	*9079	6748	6959.281	4477.58		


1. This capability is calculated according to GB/T 13331, ISO10567 standards.The limiting coefficient of the hydraulic system is 0.87, and the tipping coefficient is 0.75.
2. Marked with * is limited by hydraulic pressure, marked without * is limited by stability.
3. The lifting point is the support hole in front of the bucket rod (excluding the weight of the bucket). If there are additional accessories such as buckets, they should be deducted from the above lifting weight.
4. A- Radius of loading point (m), B- Loading point height (m).

SY305LC

SPECIFICATION


DIMENSIONS (TRANSPORT)

	SY305LC
A Transport length	10,667 mm
B Transport width (600mm track shoes)	2,995 / 3,190 mm
B Transport width (700mm track shoes)	3,290 mm
B Transport width (800mm track shoes)	3,390 mm
C Height over cabin / ROPS	3,470 mm
D Upper structure width	2,986 mm
E Track height	1,081 mm
F Track width	600/700/800 mm
G Track gauge	2,390 / 2,590 mm
H Min. ground clearance	538 mm
I Tail swing radius	3,315 mm
J Track ground length	3,916 mm
K Track length	4,840 mm
L Height of boom – transport	3,625 mm
M Counterweight clearance	1,259 mm
N Engine cover height	3,139 mm

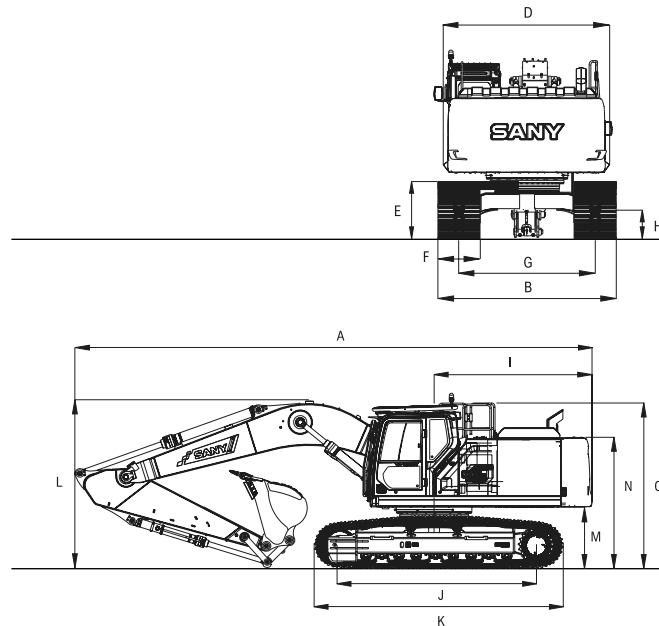

WORKING AREA

	SY305LC
A Max. digging height	10,497 mm
B Max. dumping height	7,359 mm
C Max. digging depth	6,815 mm
D Max. vertical digging depth	5,800 mm
E Max. digging reach	10,870 mm
F Min. swing radius	4,000 mm
Maximum height at minimum swing radius	8,450 mm
G swing radius	8,450 mm
Min. dumping height	2,450 mm

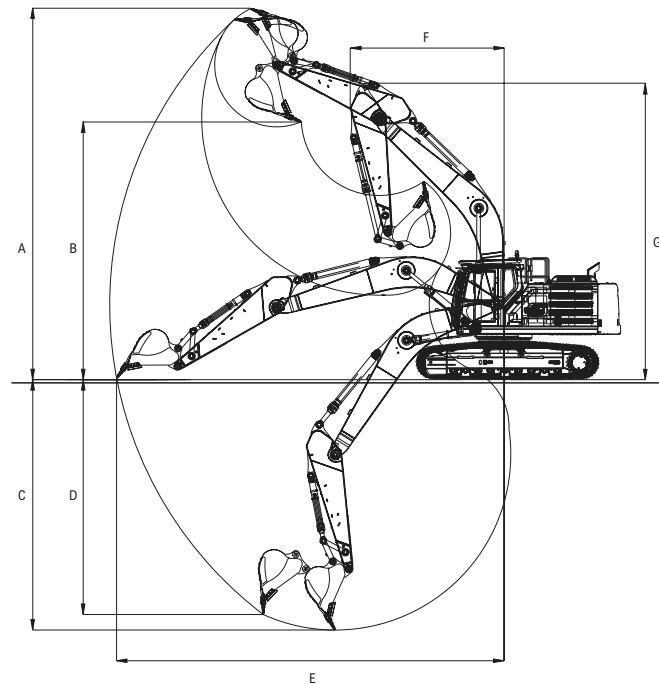

SY305LC

STANDARD/OPTIONAL EQUIPMENT

OPERATORS COMFORT / CAB

	SY305LC
Heated air suspension seat	•
Automatic heater/air conditioning	•
Bluetooth radio and speaker	•
Adjustable armrests	•
USB and Type C charging points	•
Parallel wiper	•
Front sunblind	•
10" touchscreen display	•
Sky light/roof window	•
AUX 1 on joystick	•
AUX 2 on joystick	•
Integrated heated/cooling box	•
Cup holder	•

WORKING LIGHTS

	SY305LC
Lights x 2 – front (LED)	•
Lights x 2 – boom (LED)	•
Lights x 1 – rear (LED)	•

UNDERCARRIAGE

	SY305LC
Steel tracks (600/700/800mm)	OPT
Holes / loops for fixing	•

ENGINE

	SY305LC
Auto idle	•
Fuel pump	•
Electric re-fueling pump	•

SAFETY

	SY305LC
ROPS and FOPS cab	•
Level II OPS Cab Guards	•
Battery master switch	•
Travel alarm	•
Beacon lamp	•
Emergency stop button	•
Retractable seatbelt	•
Seatbelt alarm	OPT
Lockable bonnet	•
Hand rails	•
Side and rear camera	•
360° camera	OPT
All-round mirrors	•
EVI telematics	•

WORKING EQUIPMENT

	SY305LC
Boom and arm load holding valves with overload warning	•
Double acting circuit for hydraulic quick coupler with piping	•
Breaker & shear line proportional on joystick with piping	•
Rotation line proportional on joystick with piping	•
Oil flow rate adjustable for attachments	•
Arm - 3,200 mm	•
Arm - 2,600 / 2,900mm	OPT

HYDRAULIC SYSTEM

	SY305LC
Swing brake	•
2 speed travel	•
Piping for additional hydraulic function AUX 1	•
Piping for additional hydraulic function AUX 2	•
Hydraulic pre-pressure operating joysticks	•
Main filter	•

The standard and optional equipment can differ depending on the country in which the machine is delivered. Please contact your local dealer for more information.



SANY HEAVY MACHINERY (UK) LTD
Unit 6, M8 Interlink Estate,
Coatbridge, Glasgow, ML5 4RP
Tel: 0330 2021 318
Email: info@sanyuk.com

Sanyuk.com

Not all products are available in all markets. As part of our continuous improvement process, we reserve the right to modify specifications and designs without giving prior notice. Machines shown may feature additional options other than the standard machine specification.

HEX - SY305LC - 09 - 2026 - EU - V1